

WA20 OWNERS MANUAL



2 YEAR LIMITED WARRANTY

Washburn electronics and speaker enclosures are warranted to be free of defects in materials and workmanship in normal use for a period of three (2) years from the date of original purchase. During that period, Washburn will, at its option, repair or replace materials at no charge. Products must be delivered to Washburn freight pre-paid by a Washburn Dealer or to an authorized Washburn Service Center with the original sales receipt or other proof of purchase. Warranty excludes exterior finish, normal wear and tear, failure due to abuse or operation outside the specified ratings. Warranty applies to original purchaser only. Warranty gives you specific rights which vary from state to state. For more information regarding warranty or service please contact:

Washburn Customer Service
444 East Courtland St.
Mundelein, IL 60060 USA
847-949-0444

RETAIN FOR YOUR RECORDS

(Complete, detach and return to Washburn within 10 days of purchase)

NAME: _____ AGE: _____

ADDRESS: _____

CITY: _____ STATE: _____ ZIP: _____

SERIAL NO.: _____ MODEL NO.: _____

DATE OF PURCHASE: _____ / _____ / _____ RECEIPT NO.: _____

DEALER NAME: _____

CITY: _____ STATE: _____ ZIP: _____

WHERE DID YOU HEAR OF THIS WASHBURN PRODUCT?:

☐ Dealer ☐ Friend ☐ Catalog ☐ Advertisement In: _____

WHAT INFLUENCED YOU TO BUY THIS WASHBURN PRODUCT?: (Check all applicable)

☐ Price ☐ Sound ☐ Appearance ☐ Dealer's Presentation ☐ Catalog and Specifications

HOW WILL THIS WASHBURN PRODUCT BE USED?:

☐ Sound Reinforcement / PA ☐ Band Sound System ☐ Permanent Installation ☐ DJ System

WHAT OTHER COMPONENTS WILL BE USED WITH THIS WASHBURN PRODUCT?:

WA20 FEATURES AND SPECIFICATIONS

Foreword


Thank you for purchasing the Washburn WA20 acoustic guitar amplifier. Read this manual thoroughly prior to using your amplifier in order to get the most out of the functions available. Ensure that this manual is also stored in a safe place.

Features

The WA20 amplifier provides 10W of output and utilizes a 6.5-inch driver. The preamp is equipped with a vocal guitar input. The EQ employs bass, middle, and treble controls to produce a wide range of sounds. Moreover, the speed of the chorus effect (turned ON/OFF by switch) can be controlled.

Precautions During Use

- Do not subject the amplifier to shocks by dropping or rough handling.
- Install the amplifier in a stable location. The amplifier will sound differently depending on the method, location, or venue of installation.
- Ensure that the power supply is switched OFF when the amplifier is not in use. Also remove the power cable from the power supply socket when the amplifier is not to be used for an extended period of time.
- Do not use or store the amplifier in locations where it is subject to direct sunlight or in environments that experience dramatic fluctuations in temperature and humidity levels.
- Reduce the volume to "0" or switch OFF the power supply when connecting the guitar shielded cable, the microphone cable, and cables connected to external units, such as the effects. Note that the noise generated when plugs are inserted or removed may cause severe damage to equipment.

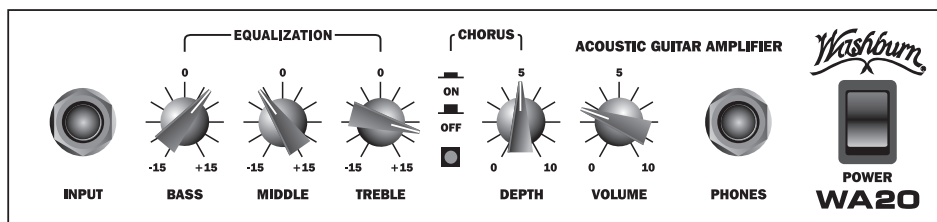

SPECIFICATIONS

OUTPUT POWER:	10W .THD3% (at1KHz 8Ω)
POWER CONSUMPTION:	17W
INPUT SENSITIVITY:	-31dB
S/N:	55dB
CONTROLS:	INPUT VOLUME CHORUS SPEED BASS 20Hz ± 15dB MIDDLE 5KHz ± 2dB TREBLE 18KHz ± 10dB
SWITCHES:	POWER ON/OFF CHORUS ON/OFF
JACKS:	MICROPHONE INPUT 1/4" STEREO MICROPHONE INPUT XLR GUITAR INPUT
SPEAKER UNITS:	POWER JAM PJ30A 15W RMS (30W PEAK)

APPLY
FIRST
CLASS
POSTAGE

WARRANTY
CARD

DETACH
AND MAIL

WASHBURN

444 East Courtland, St.
Mundelein, IL 60060
USA